



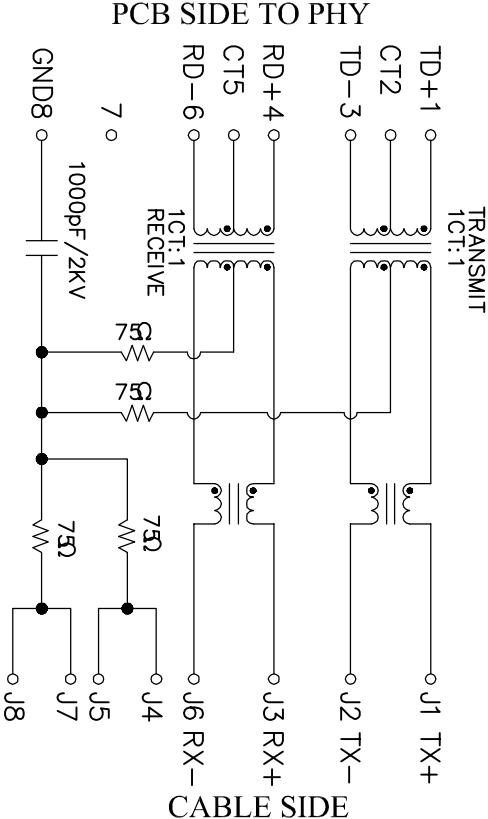


Electrical:

- Turn ratio:1~3:J1~J2=1CT:1CT(±2%).
4~6:J3~J6=1CT:1CT(±2%).
- OCL:350uH Min.at 100KHz 100mV 8mA DC.
- Insertion Loss: -1.0 dB Max 1~100MHz.
- Return loss: -20dB Min 1~10MHz;
-1.6dB Min 10~30MHz;
-1.2dB Min 30~60MHz;
-1.0dB Min 60~80MHz.
- Cross talk: -40dB Min 1~30MHz;
-35dB Min 30~60MHz;
-30dB Min 60~100MHz;
- CMR: -30dB Min 1~100MHz;
- Hi-Pot:1500V~AC & 2250V DC
6S 1mA PRI TO SEC

LED Specification

Standard LED Color	LED Wavelength(nm)	Forward(A)	Forward(V)
Green	568nm±20nm		1.8-2.45V
Yellow	585nm	20mA	1.7-2.2V

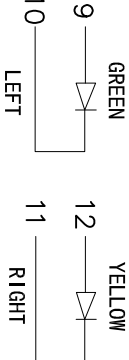

Part Number: 558 76 88 1 X 1 0 K

Series Number.:
Ordinal Number:
Number of contact:
No. of port:
1-1port,

Insulator Code:
1-Black
Plating Code:
1-Gold flash plated over Nickel
3-3u" Gold plated over Nickel
5-5u" Gold plated over Nickel
F-6u" Gold plated over Nickel
6-10u" Gold plated over Nickel
7-15u" Gold plated over Nickel
8-30u" Gold plated over Nickel



LEYCONN ELECTRONICS CO.,LTD.
深圳市联益康电子有限公司
TEL: +86(755)26078616 FAX: 26070522

E				Units	mm	Scale	3:1	Drawing By	Date	<div><div>LEYCONN ELECTRONICS CO.,LTD. 深圳市联益康电子有限公司 TEL: +86(755)26078616 FAX: 26070522</div></div>						
D				Tolerance Unless Otherwise Specified			Lin-Wu	2019/07/01								
C							Revised By	Date			Sheet	2 of 2	Title	55876 8P8C 带灯带弹带滤波	左绿右黄	
B				.X ~ ±0.30			YP-Liang	2019/07/01			Third Angle Projection		Part No.	55876881X10K	REV	A
A				.XX ~ ±0.25			Approval By	Date								
				.XXX ~ ±0.20												
REV				Angle ~ ± 3°			Kirby-Xiao	2019/07/01								
1		2		3		4		5		6		7		8		