
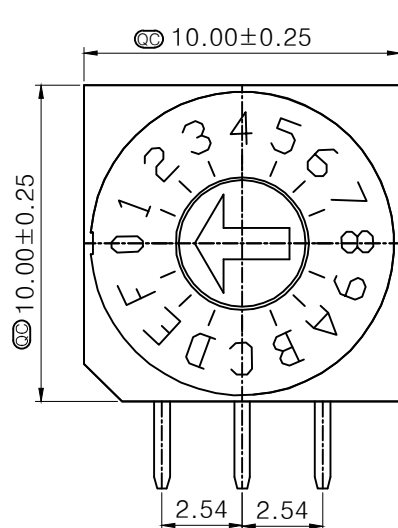
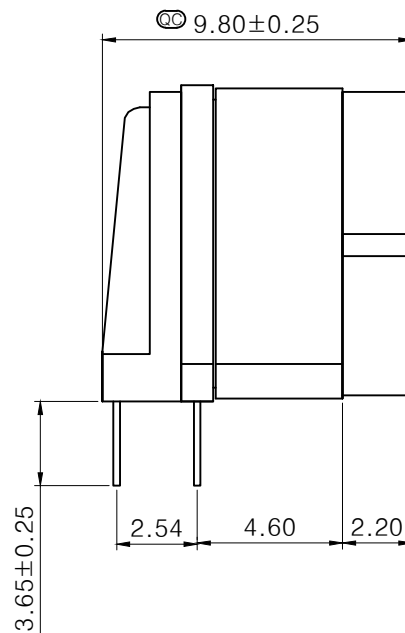


This document contains information confidential and proprietary to LEYCONN and shall not be reproduced or transferred to another document or disclosed to others or used for any purpose other than that for which it was obtained without the express written consent of LEYCONN.

RoHS

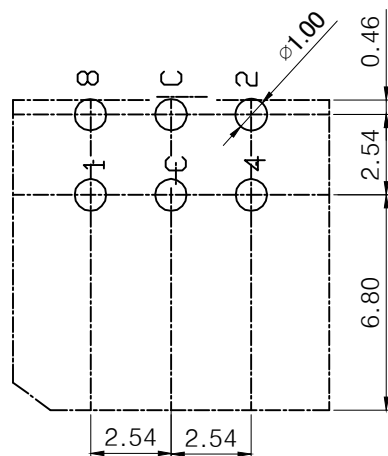

P.C.B Dimension

SPECIFICATION

- Rating: 150mA, 42V DC (Switching)
200mA, 42V DC (None-Switching)
 - Minimum load: 1.0 μ A 20mVDC
 - Test voltage: 250.0 V 50 Hz / 1.0 min
 - Contact Resistance: 80m Ω Max
 - Insulation Resistance: 100 Ω Min
 - Perm. ambient temperature: -60 °C ~ +125 °C
 - Perm. storage temperature -65 °C ~ +135 °C
 - Mechanical lifetime: 30,000 steps
 - Operating Force: 700gf Max
 - Reflow soldering: 10 s / 260 °C
 - Wave soldering: Double Wave acc. DIN EN 61760-1:2006
 - Iron soldering: 2 s / 340 °C
 - THR through holes: plated through
 - THR PCB hole diameter: 1.0 mm
 - Outside diameter plated land: 1.8 mm
- Ⓢ Important Dimensions



Part Number:

461 014 06 3 0 2 0

Designation
014-Switch
Pin number
06-6 Pin
Position:
3-16位

Packaging Options :
2-Tube Packaging

		Real Code				
		C	1	2	4	8
10 p o s i t i o n	0	●				
	1	●	●			
	2	●		●		
	3	●	●	●		
	4	●			●	
	5	●	●		●	
	6	●		●	●	
	7	●	●	●	●	
	8	●				●
	9	●	●			●
16 p o s i t i o n	A	●		●		●
	B	●	●	●		●
	C	●			●	●
	D	●	●		●	●
	E	●		●	●	●
	F	●	●	●	●	●

E			Units	mm	Scale	3:1	Drawing By	Date	Leyconn LEYCONN ELECTRONICS CO.,LTD. 深圳市联益康电子有限公司 Http://www.leyconn.com TEL: +86(755)26078616 FAX: 26070522			
D			Tolerance Unless Otherwise Specified				Lin-Wu	2019/10/12				
C							Revised By	Date	Sheet	1 of 1	Title	Switch(white) 10*10*9.8 6Pin PC3.5
B							Kirby-Xiao	2019/10/12	Third Angle Projection		Part No.	461014063020
A	RELEASED	12/10/19					Approval By	Date			REV	A
REV	DESCRIPTION.	Date	Angle ~ ± 3°				Luli-Liu	2019/10/12				