
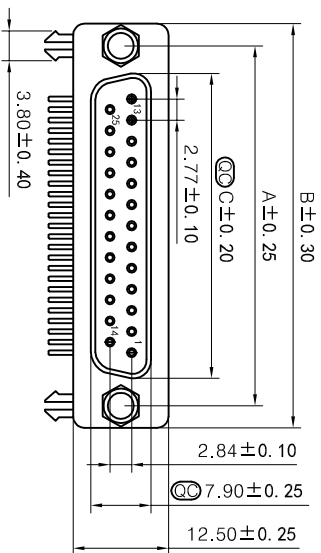
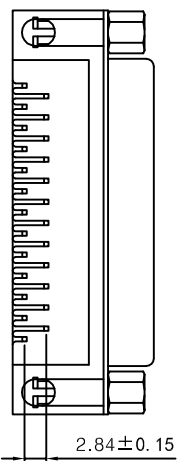


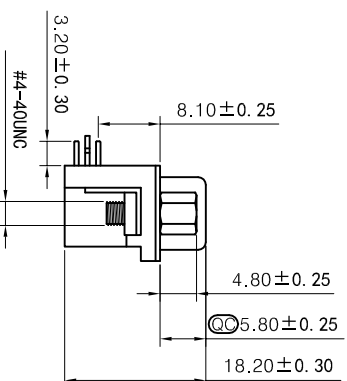

	Dim A	Dim B	Dim C
Circuits			
9	25.00	30.80	16.30
15	33.32	39.20	24.60
25	47.04	53.10	38.30
37	63.50	69.40	54.80

Electrical Data—

Current rating: 3Amps
Dielectric Withstanding Voltage: 1000VAC for one minute
Contact Resistance: < 20 m Ω
Insulation Resistance: > 5000 M Ω
Operating Temperature: -40°C ~ +105°C


Construction:

Insulator: PBT, Glass Filled Polyester
Flammability Rating: UL 94V-0
Contacts: Phosphor Bronze of copper alloy
Contacts plating: Selective gold on surface contact area

Part Number:

502NN233XX0T

Series No.: _____ 0-D-SUB(Punch Pin) Outline Option: _____ 2-Standard SUB Number of Contact: _____ Straight D-SUB-(09,15,25,37) Contact Type: _____ 2-Female	Insulator Color: _____ 1-Black 2-Green 3-White 4-Blue Plating Code: _____ 1-Selective Gold flash over Nickel plated 2-Gold flash over Nickel plated Connection Style: _____ 3 - Right Angle Solder
---	--

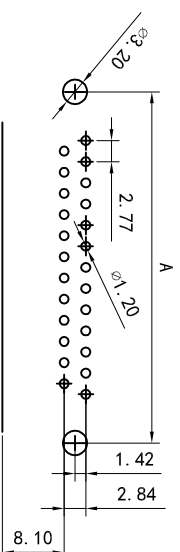

E				Units	mm	Scale	1:1	Drawing By	Date	<div> LEYCONN ELECTRONICS CO.,LTD. 深圳市联益康电子有限公司 TEL: +86(755)26078616 FAX: 26070522</div>					
D				Tolerance Unless		Otherwise Specified		Hui-Wen	2015/06/25	<div>Http://www.leyconn.com</div> <div>Sheet1 of 1</div> <div>Third Angle Projection</div>					
C				.X ~ ±0.30		Revised By		Date							
B				.XX ~ ±0.25		Nick-Yin		2015/06/25							
A				.XXX ~ ±0.20		Approval By		Date		Title		D-SUB Female, Right Angle Solder		铆锁系列	
REV				Angle ~ ± 3°		Kirby-Xiao		2015/06/25		Part No.		502NN233XX0T		REV	A
1		2		3		4		5		6		7		8	